


P/N: T199559

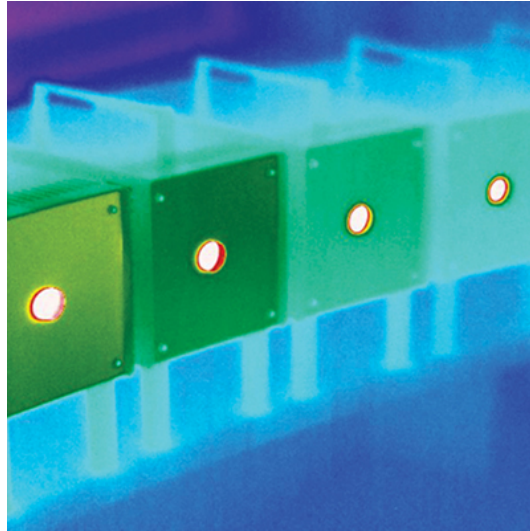

General description	
For high temperature applications the camera can be calibrated for high temperature ranges.	
Measurement	
Temperature range	+300 to +1000°C (+572 to +1832°F)

www.tulon.ru

Compatible with the following products:

- 84502-0201; FLIR E53 24°
- 78501-0101; FLIR E75 14°
- 78502-0101; FLIR E75 24°
- 78504-0101; FLIR E75 24° + 14°
- 78506-0101; FLIR E75 24° + 14° & 42°
- 78505-0101; FLIR E75 24° + 42°
- 78503-0101; FLIR E75 42°
- 78507-0101; FLIR E75 42° + 14°