




Thermal Imaging Riflescopes

TRAIL **XQ38**
LRF XQ38



**Reticle
Catalogue**

Non-scalable reticles

The values of the non-scalable reticles are correct in the following cases:

- when the magnification of the scope is set to minimum
- when "picture in picture" is activated

D50i

H50i

M50i

M51i

M54i

T50i

T51AI

T52i

X50i

X51i-150

X52i

X53i

X54i



www.tulon.ru

Scalable reticles

Reticle parameters apply to all magnifications

M56Fi

D50i

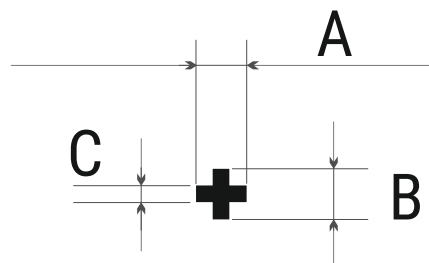



Reticle parameters (for 2.1x magnification)

	MOA / cm @ 100 m
Section A	2.8 / 8
Section B	2.8 / 8
Section C	0.9 / 2.7

www.tulon.ru



H50i

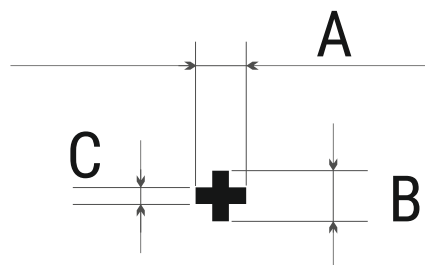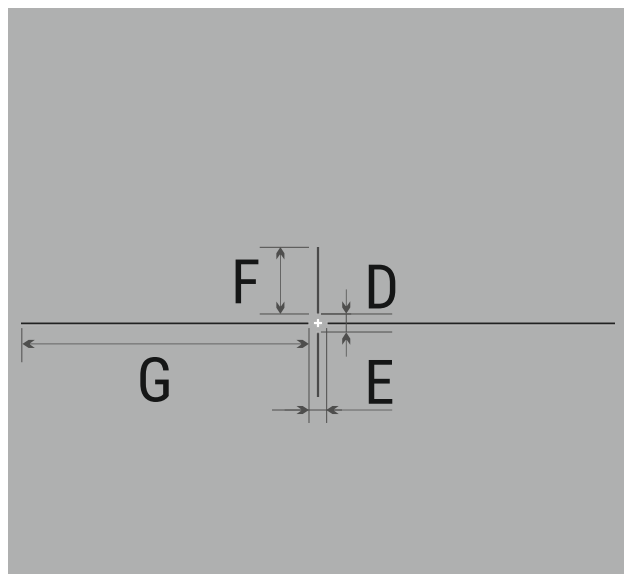

Reticle parameters (for 2.1x magnification)

	MOA / cm @ 100 m
Section A	2.8 / 8
Section B	2.8 / 8
Section C	0.9 / 2.7
Section D	6.4 / 18.8
Section E	6.4 / 18.8
Section F	23.9 / 69.7
Section G	103.1 / 300

M50i

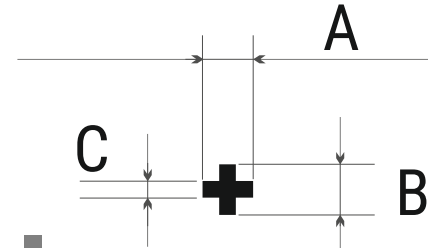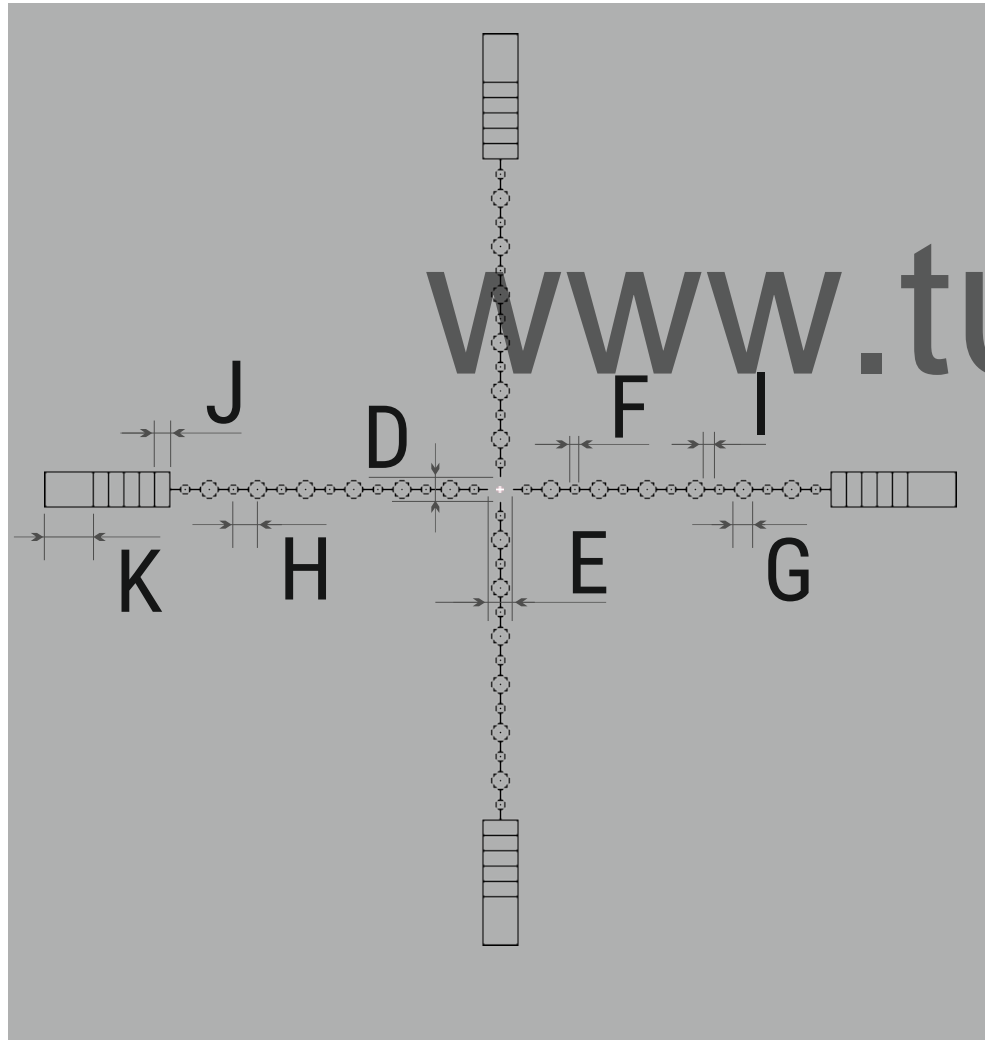



Reticle parameters

(for 2.1x magnification)

MOA / cm @ 100 m

Section A	2.8 / 8
Section B	2.8 / 8
Section C	0.9 / 2.7
Section D	10.1 / 29.5
Section E	10.1 / 29.5
Section F	4.6 / 13.4
Section G	8.3 / 24.1
Section H	10.1 / 29.5
Section I	4.6 / 13.4
Section J	6.4 / 18.8
Section K	20.3 / 58.9

M51i

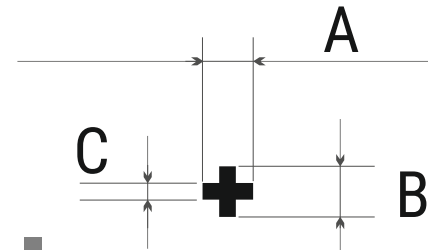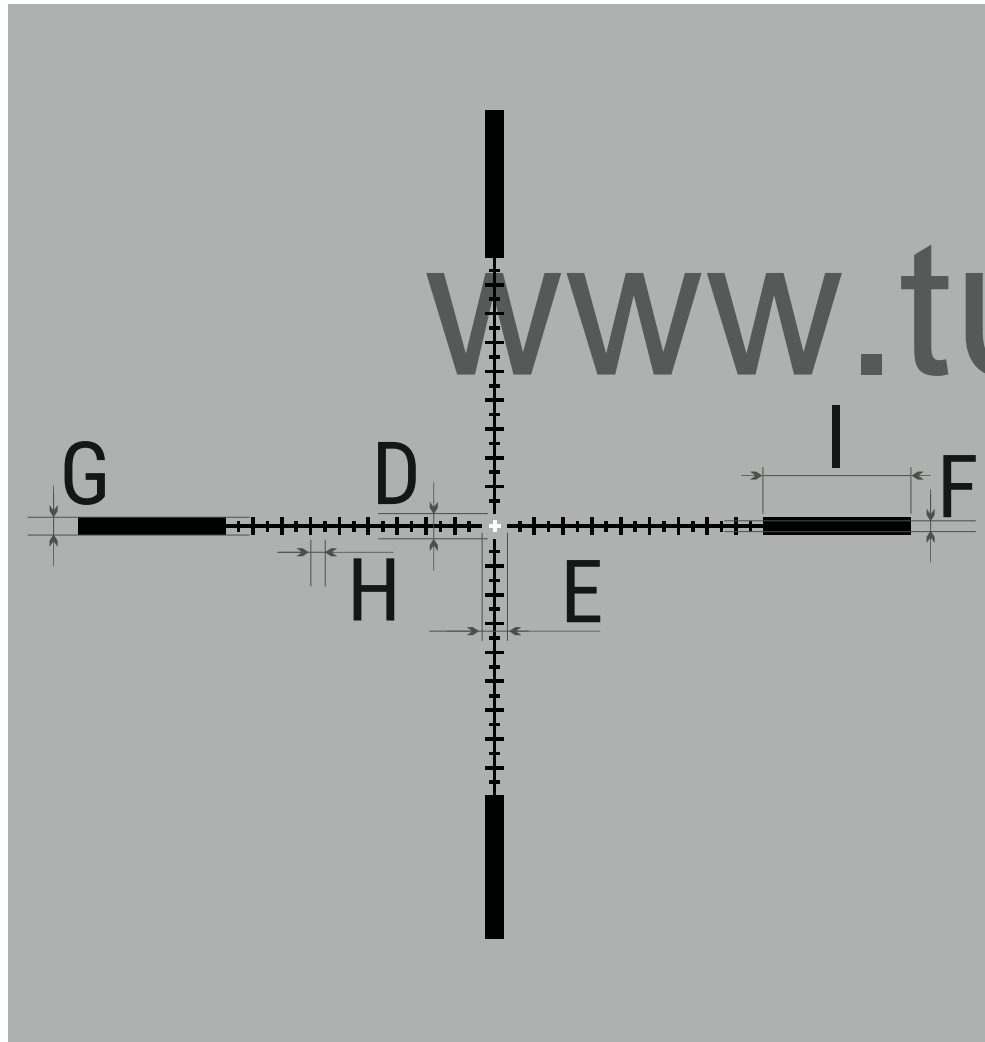

Reticle parameters

(for 2.1x magnification)

MOA / cm @ 100 m

Section A

2.8 / 8

Section B

2.8 / 8

Section C

0.9 / 2.7

Section D

6.4 / 18.8

Section E

6.4 / 18.8

Section F

2.8 / 8

Section G

4.6 / 13.4



Section H

3.7 / 10.7

Section I

37.7 / 109.8

M54i

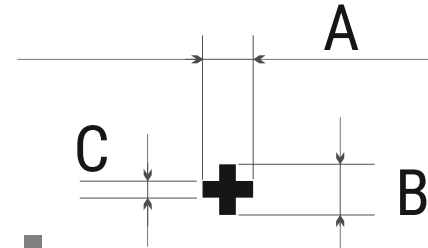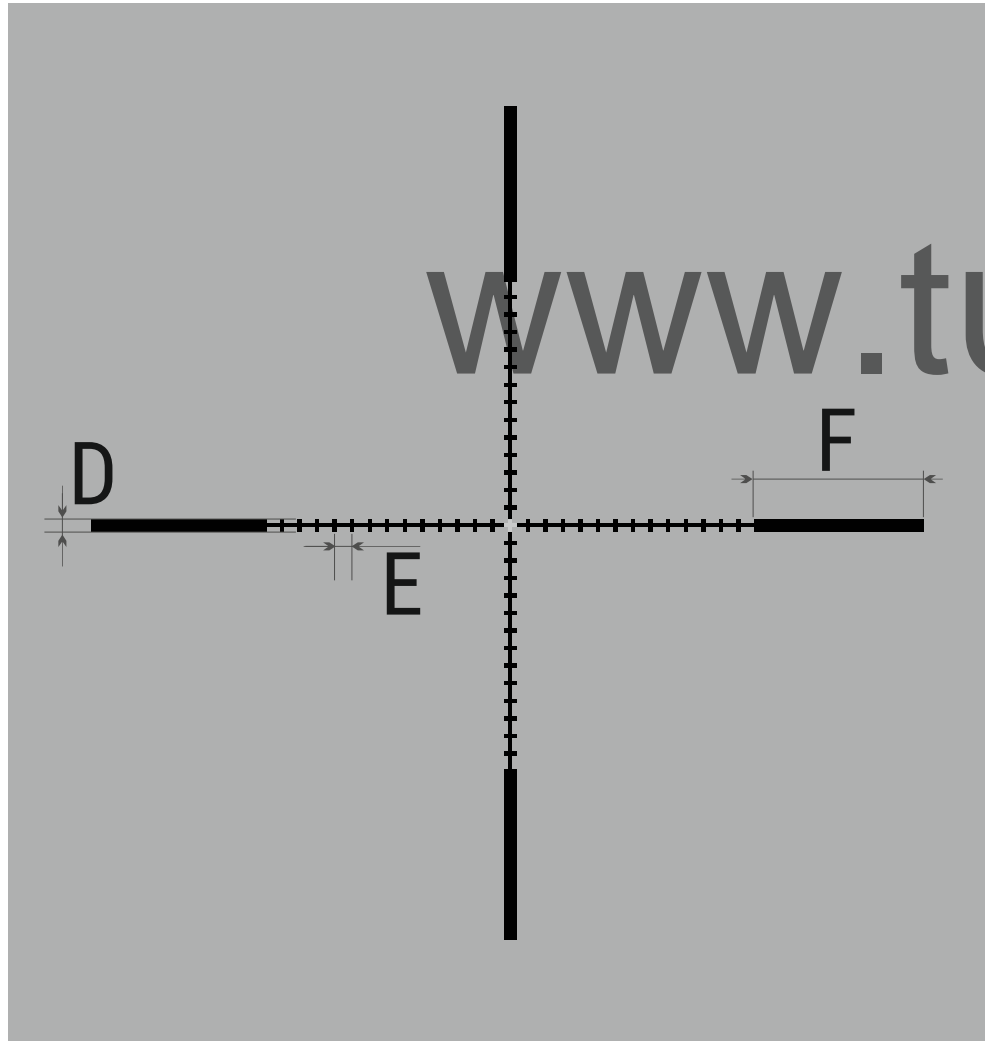

Reticle parameters

(for 2.1x magnification)

MOA / cm @ 100 m

Section A

2.8 / 8

Section B

2.8 / 8

Section C

0.9 / 2.7

Section D

2.8 / 8



Section E

3.7 / 10.7

Section F

36.8 / 107.2

T50i

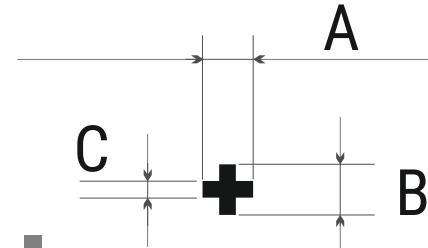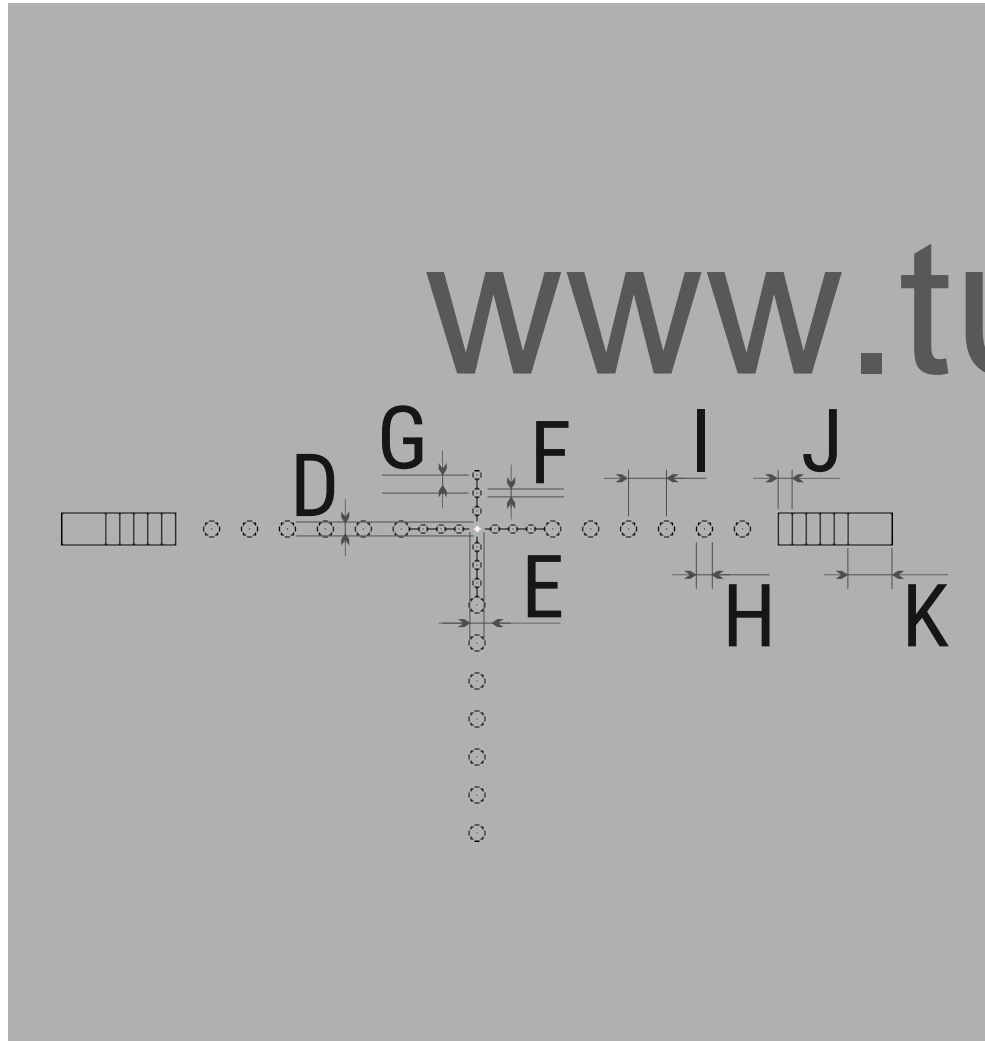

Reticle parameters

(for 2.1x magnification)

MOA / cm @ 100 m

Section A

2.8 / 8

Section B

2.8 / 8

Section C

0.9 / 2.7

Section D

6.4 / 18.8

Section E

6.4 / 18.8

Section F

4.6 / 13.4

Section G

8.3 / 24.1

Section H

8.3 / 24.1

Section I

17.5 / 50.9



Section J

6.4 / 18.8

Section K

20.3 / 58.9

T51AI

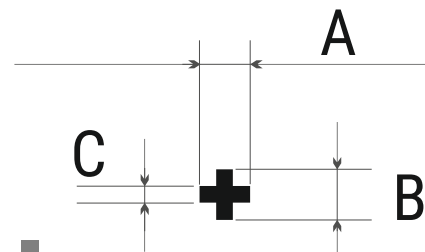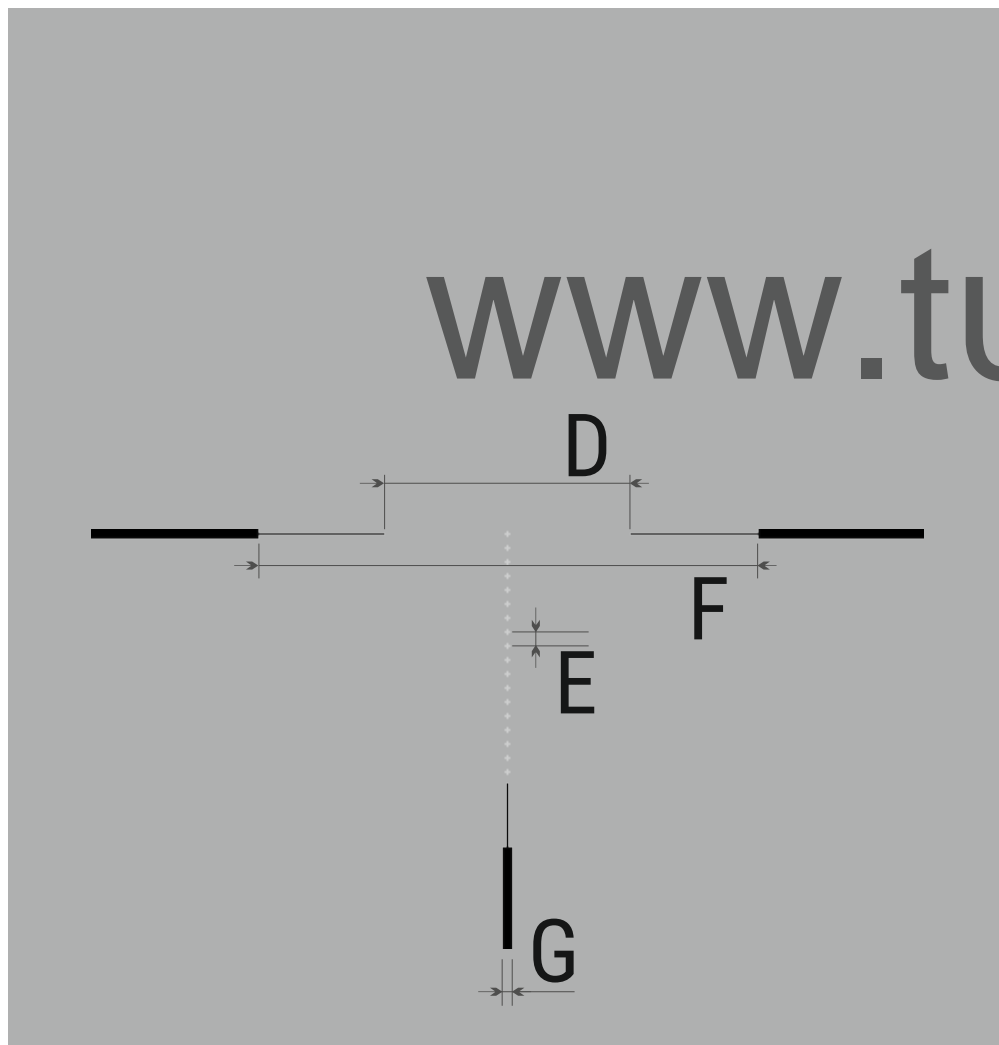

Reticle parameters

(for 2.1x magnification)

MOA / cm @ 100 m

Section A

2.8 / 8

Section B

2.8 / 8

Section C

0.9 / 2.7

Section D

114.2 / 332.2

Section E

6.4 / 18.8



Section F

230.1 / 669.7

Section G

4.6 / 13.4

T52i

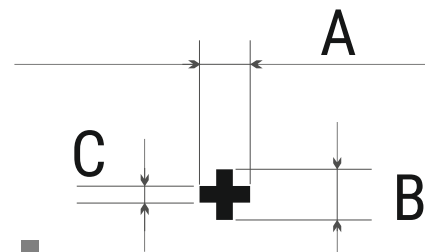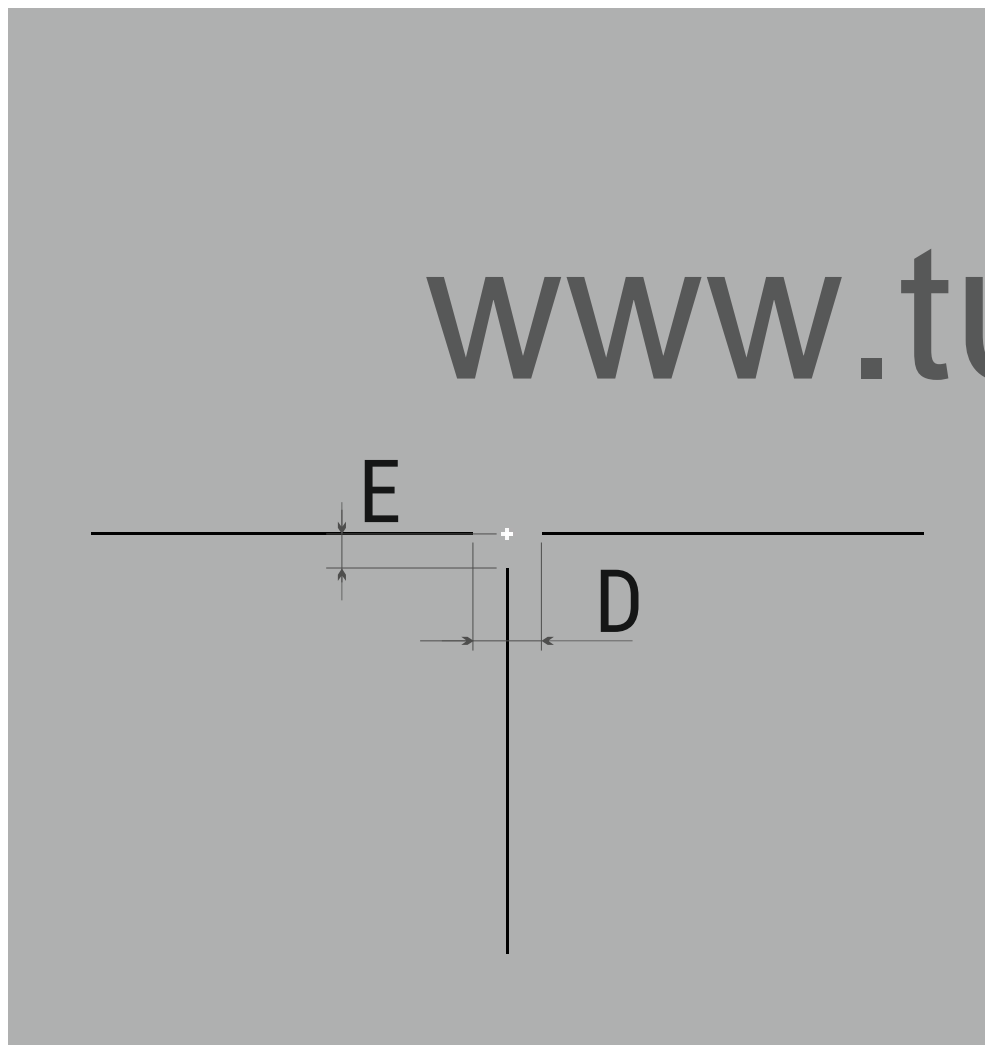

www.tulon.ru

Reticle parameters

(for 2.1x magnification)

MOA / cm @ 100 m

Section A

2.8 / 8

Section B

2.8 / 8

Section C

0.9 / 2.7



Section D

18.4 / 53.6

Section E

9.2 / 26.8

X50i

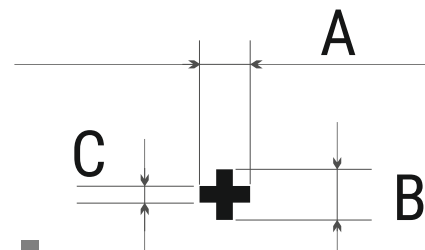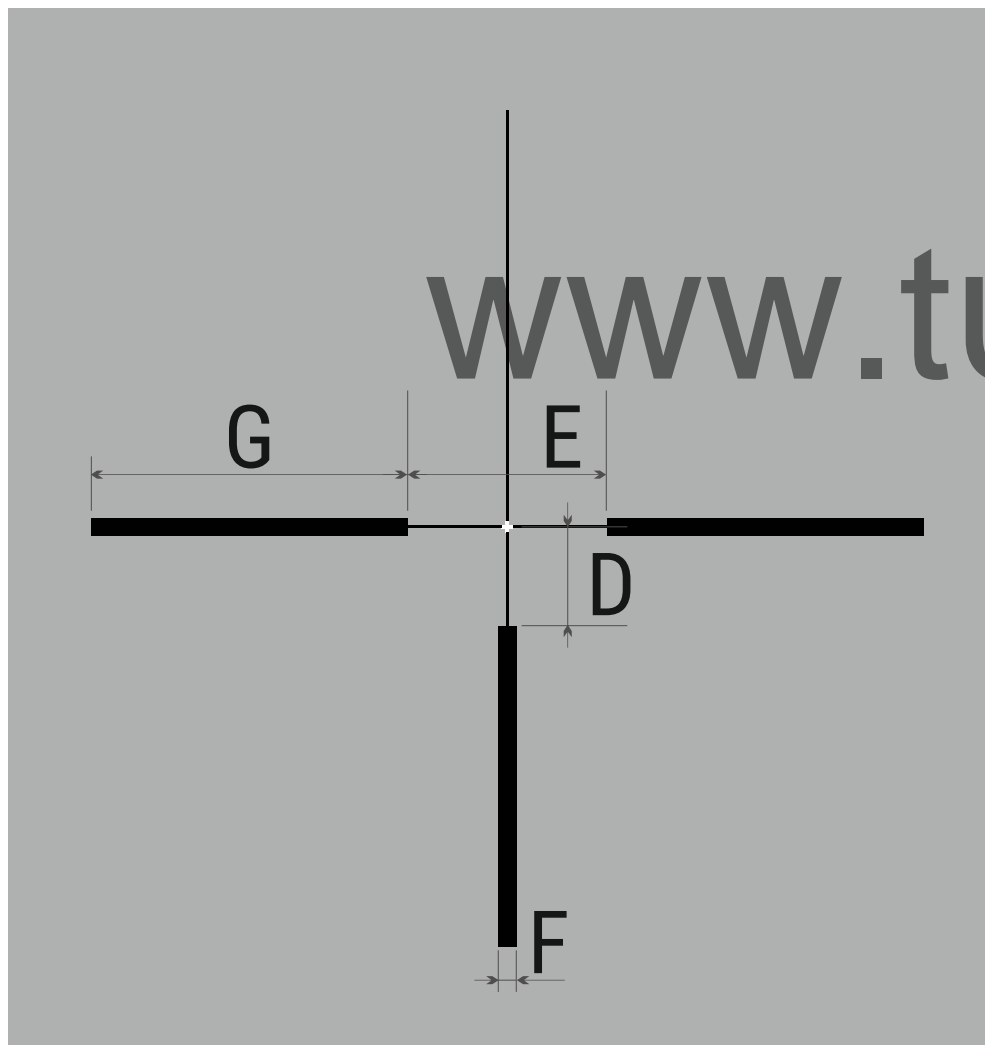

Reticle parameters

(for 2.1x magnification)

MOA / cm @ 100 m

Section A

2.8 / 8

Section B

2.8 / 8

Section C

0.9 / 2.7

Section D

25.8 / 75

Section E

51.6 / 150



Section F

4.6 / 13.4

Section G

81 / 235.7



X51i-150

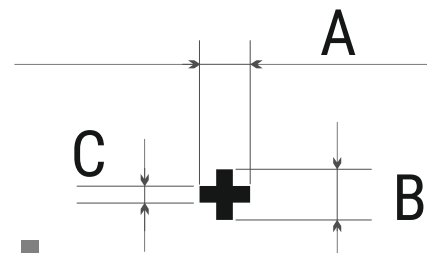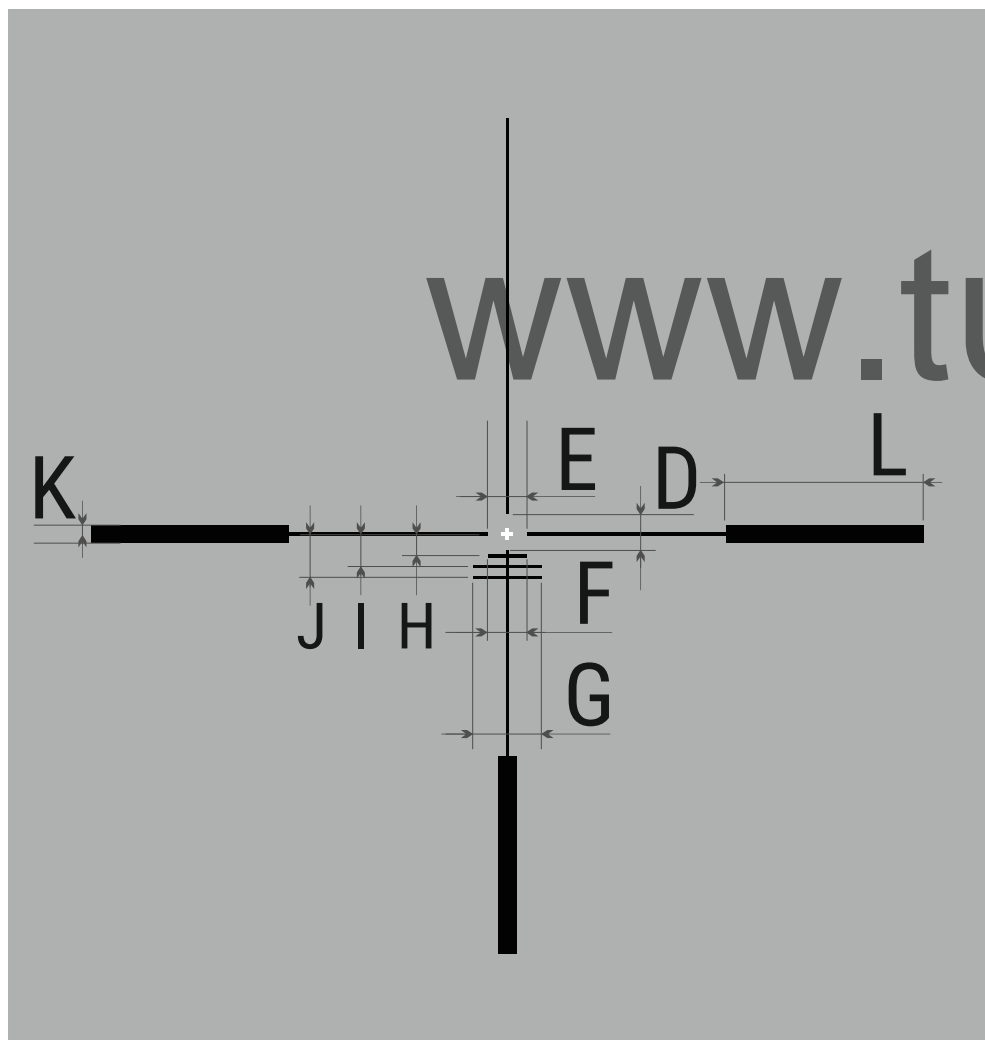

Reticle parameters
(for 2.1x magnification)

	MOA / cm @ 100 m
Section A	2.8 / 8
Section B	2.8 / 8
Section C	0.9 / 2.7
Section D	10.1 / 29.5
Section E	9.2 / 26.8
Section F	10.1 / 29.5
Section G	17.5 / 50.9
Section H	5.5 / 16.1
Section I	8.3 / 24.1
Section J	11 / 32.1
Section K	4.6 / 13.4
Section L	50.6 / 147.3

X52i

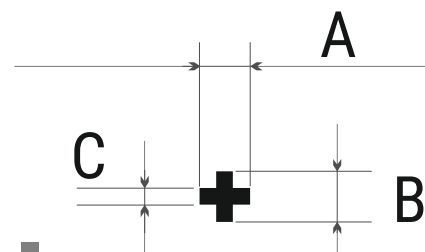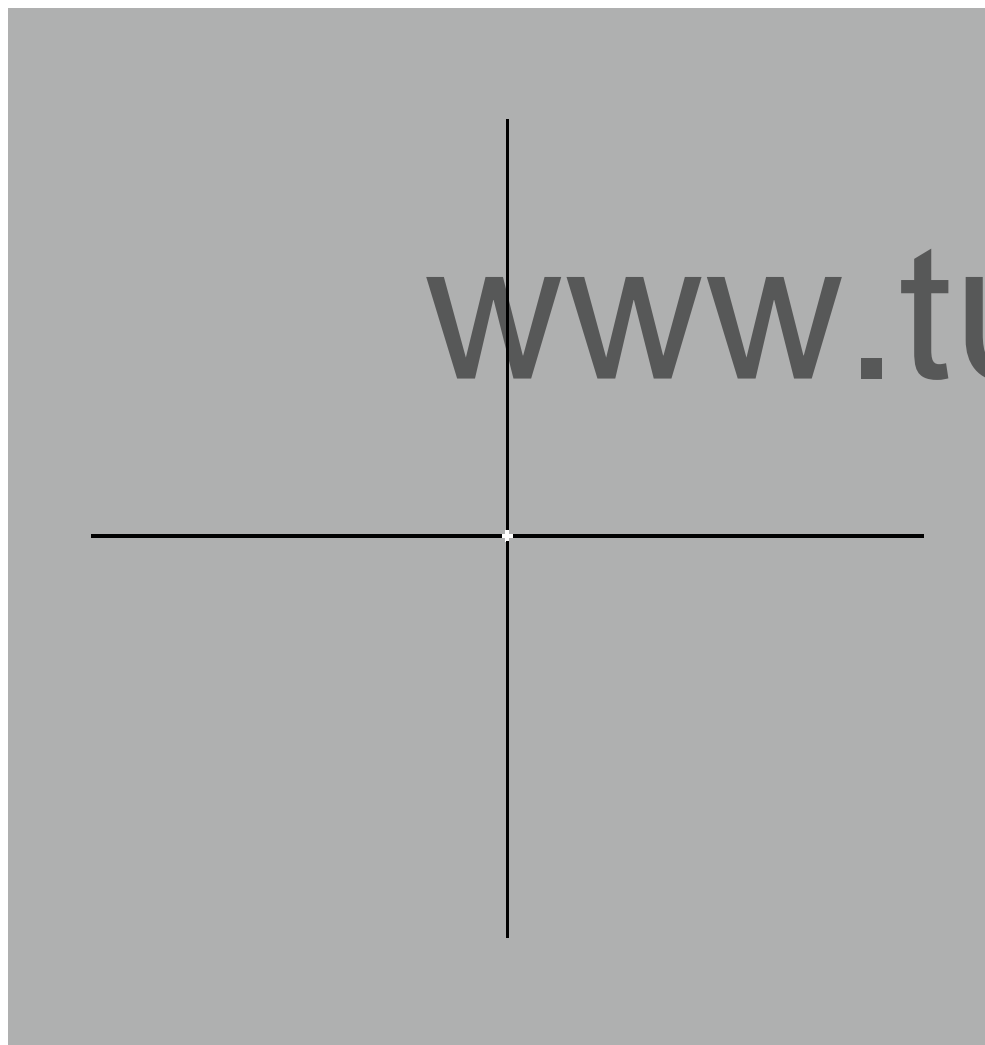

Reticle parameters

(for 2.1x magnification)

MOA / cm @ 100 m

Section A

2.8 / 8



Section B

2.8 / 8

Section C

0.9 / 2.7

X53i

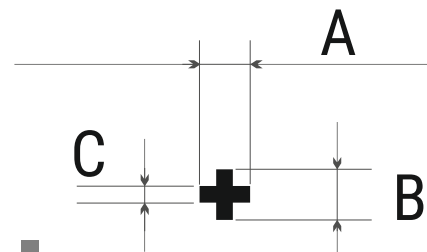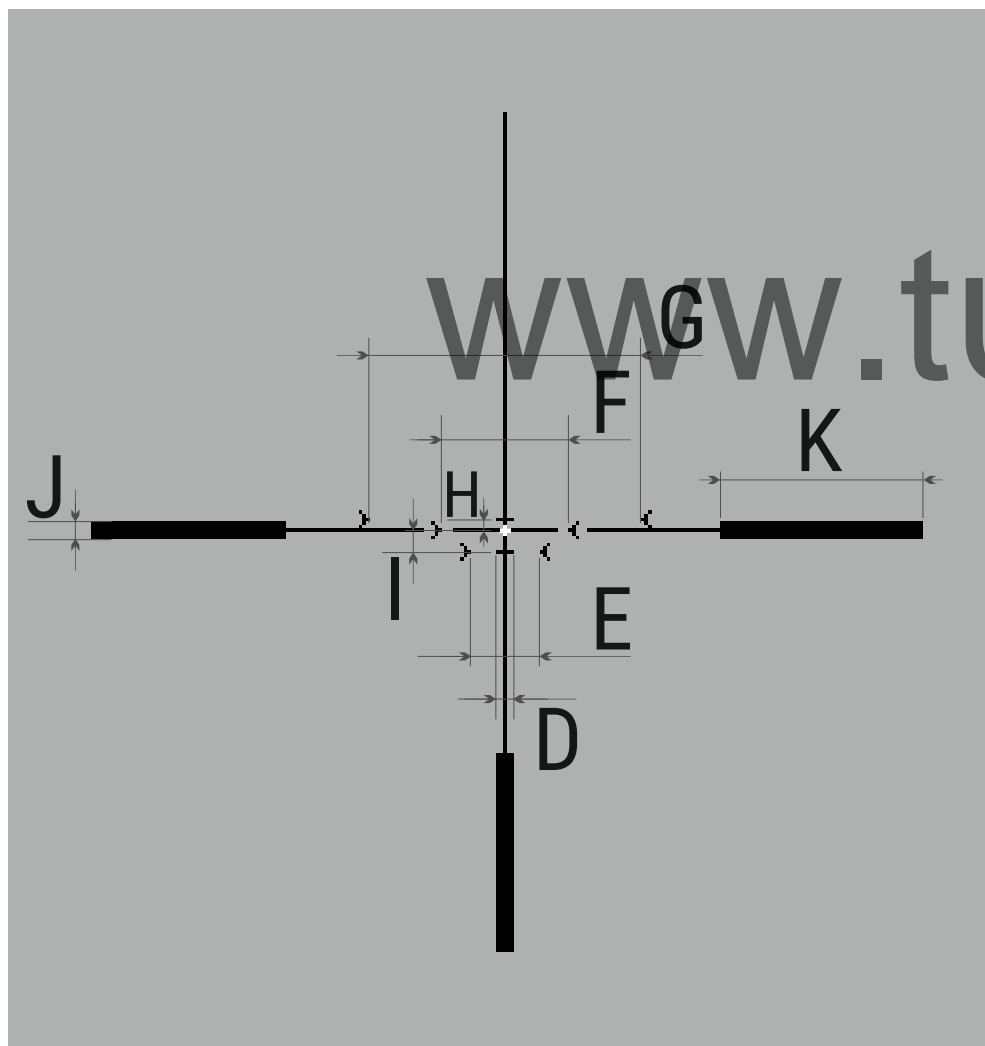



Reticle parameters

(for 2.1x magnification)

MOA / cm @ 100 m

Section A	2.8 / 8
Section B	2.8 / 8
Section C	0.9 / 2.7
Section D	4.6 / 13.4
Section E	18.4 / 53.6
Section F	33.1 / 96.4
Section G	70 / 203.6
Section H	2.8 / 8.0
Section I	5.5 / 16.1
Section J	4.6 / 13.4
Section K	49.7 / 144.7

X54i

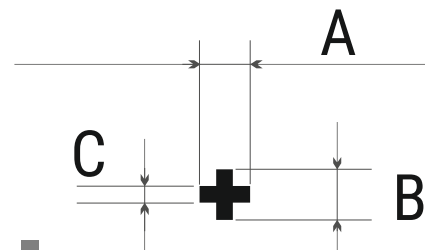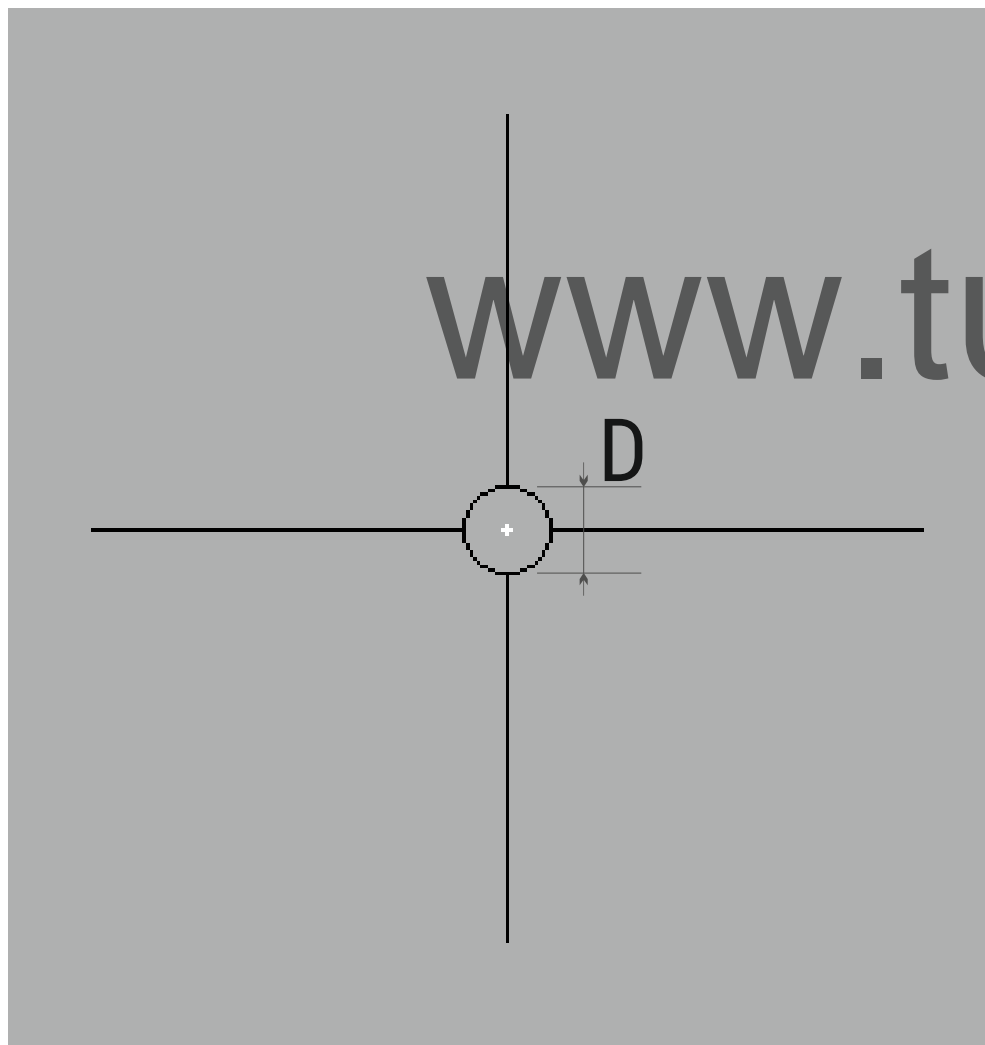

Reticle parameters

(for 2.1x magnification)

MOA / cm @ 100 m

Section A

2.8 / 8

Section B

2.8 / 8


Section C

0.9 / 2.7

Section D

23 / 67

M56Fi

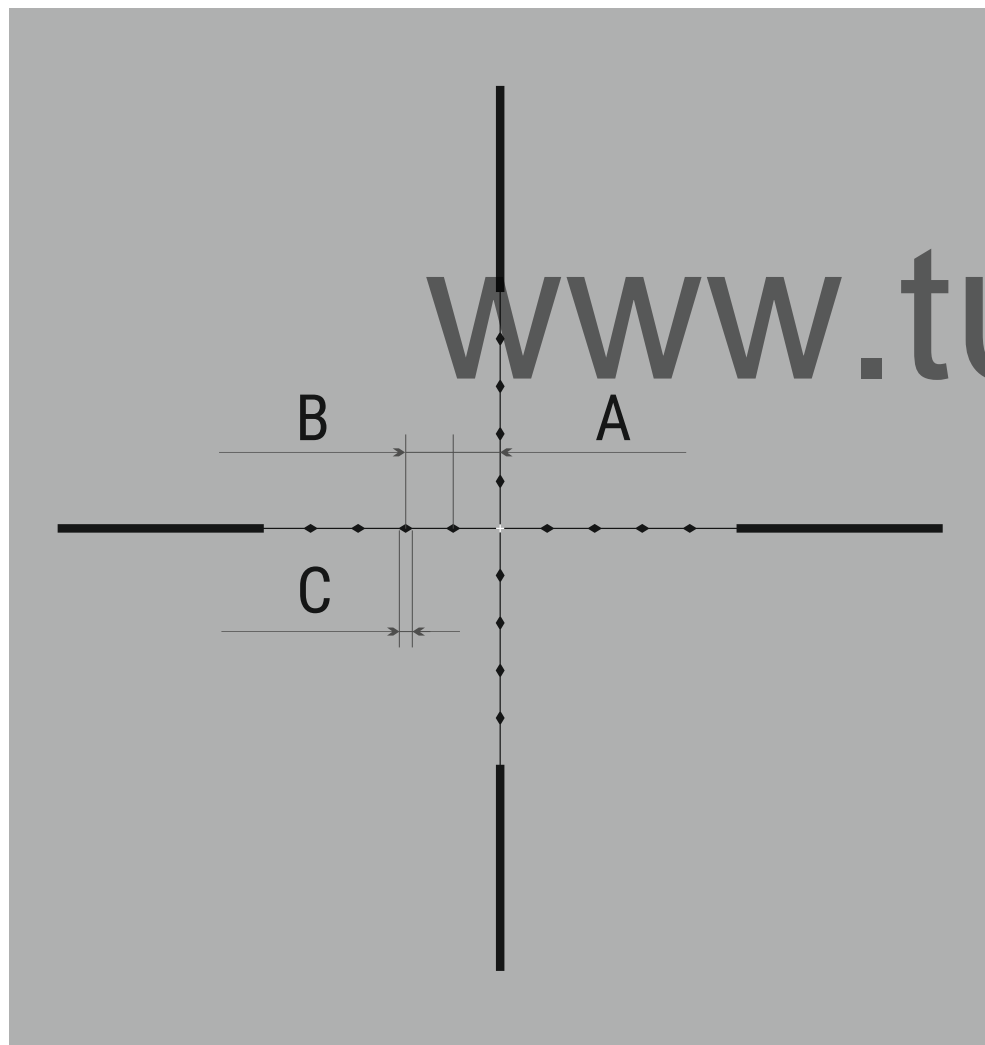

Reticle parameters (apply to all magnifications)	MOA / cm @ 100 m
Section A	3.5 / 10 (1 mil)
Section B	3.5 / 10 (1 mil)
Section C	0.86 / 2.5 (0.25 mil)